



Used Gast R5125Q-50 2HP, 115/230V, 1PH XP Blower

SPECIFICATIONS


Dimensions: 17.5" x 13.56" x 13.78"

Weight: 77 Lbs. (Blower Only)

Brand: Gast

Model: R5125Q-50
Max Pressure: 55" H2O
Max Vacuum: 60" H2O
Max Air Flow: 145 SCFM

Motor: Baldor
Explosion Proof: Yes
Horsepower: 2.0
Phase: 1
Voltage: 115/230
RPM: 3450

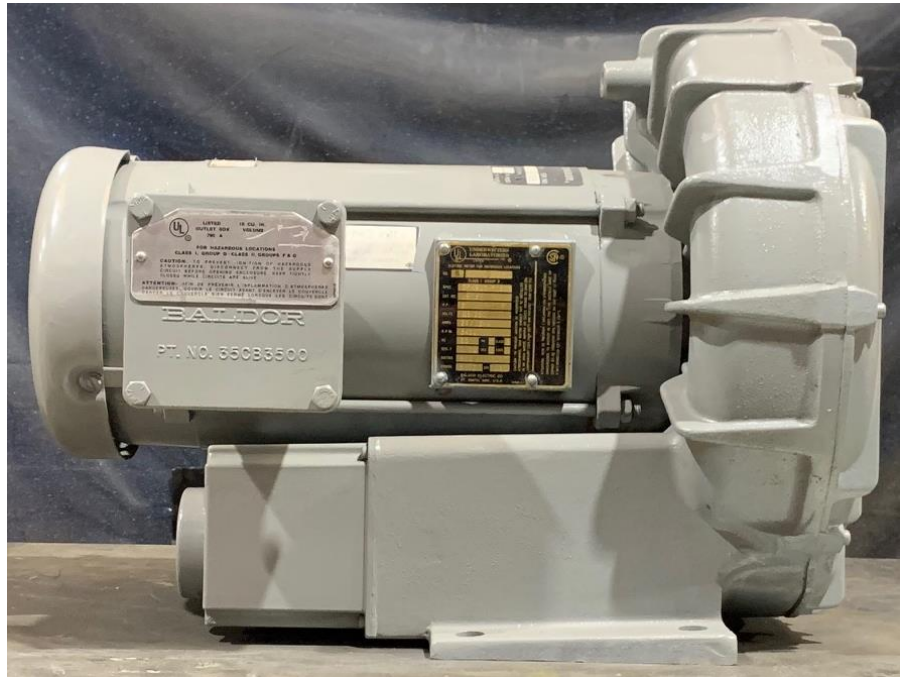



	GAST MANUFACTURING, INC. A Unit of IDEX Corporation Post Office Box 97 Benton Harbor, Michigan Ph: 269/926-6171 Fax: 269/925-8288	PART NUMBER: <div style="font-size: 24pt; font-weight: bold; text-align: center;">LTD179</div>	REV. <div style="font-size: 24pt; font-weight: bold; text-align: center;">A</div>
--	--	---	--


MODEL NUMBER	MOTOR SPECIFICATIONS	RPM	MAX VAC		MAX PRESS		HP	kW	NET WT.	
			"H ₂ O	mbar	"H ₂ O	mbar			lbs.	kg
R5125Q-50	115/230-60-1	3450	60	149	55	137	2.0	1.49	77	35

SOUND LEVEL 75 dB(A) MAX. @ 60 Hz
 NORMAL AMBIENT -29°C TO 40°C
 RELATIVE HUMIDITY 0% - 100% NON CONDENSING
 ENVIRONMENT CLEAN DUST FREE

UL AND CSA APPROVED MOTOR FOR EXPLOSIVE GAS ATMOSPHERES CLASS 1, GROUP D, CLASS 2, GROUP F AND G.

THIS BLOWER IS DESIGNED FOR SOIL AND GROUND WATER REMEDIATION.

Product Performance

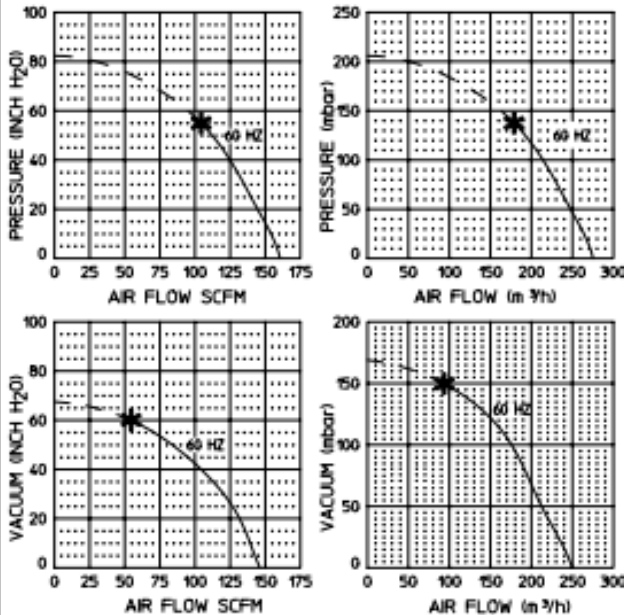

TECHNICAL DATA SUBJECT TO CHANGE WITHOUT NOTICE.

PERFORMANCE DATA
 THE PERFORMANCE DATA SHOWN WAS DETERMINED UNDER THE FOLLOWING CONDITIONS:

LINE VOLTAGE @ 60 Hz, 230V OR 460V FOR 3 PHASE UNITS. 115V OR 230V FOR 1 PHASE UNITS.

LINE VOLTAGE @ 50 Hz, 220V FOR 3 PHASE OR 1 PHASE UNITS.

UNITS IN A TEMPERATURE STABLE CONDITION.

DELIVERY MEASUREMENTS MADE WITH OUTPUT PORT THROTTLED.

SUCTION MEASUREMENTS MADE WITH INPUT PORT THROTTLED.

TEST CONDITIONS: INLET AIR DENSITY @ 0.075 lbs. per cu. ft. [20°C (68°F), 29.92" Hg (14.7 PSIA)].

NORMAL PERFORMANCE VARIATIONS ON THE RESISTANCE CURVE WITHIN ±10% OF SUPPLIED DATA CAN BE EXPECTED.

* = RECOMMENDED MAXIMUM DUTY
 - - - INTERMITTENT DUTY ONLY

Product Dimensions

